

COMBINATION BATTERY BACK UP / PRIMARY SUMP PUMP SYSTEM



CONSTRUCTION

- ▶ Upper Float Guard
- ▶ Stainless Steel Housing and Cast Iron Base with Top Suction Intake to Filter Debris and Minimize Clogging
- ▶ 1-1/2 in. NPT Discharge for Easy Installation and Compliance with Building Codes
- ▶ For Use In 16 in. Diameter or Larger Sump Basins
- ▶ 8 ft. SJTW Power Cord
- ▶ Protective Battery Case Included with LED Display, Audible Alarm and Push-to-Test Button
- ▶ Pre-installed with Two Quiet Check Valves


BENEFITS

- ▶ This system is easy to install in a 16 in basin. Start to finish in about 15 minutes.
- ▶ Removes up to 10,000 on a single battery charge with the required 75AH WSB1275 battery.
- ▶ This pump is assembled in the USA to deliver dependable performance that lasts for years.
- ▶ Protects your basement with hours of pumping power when the electricity goes out.



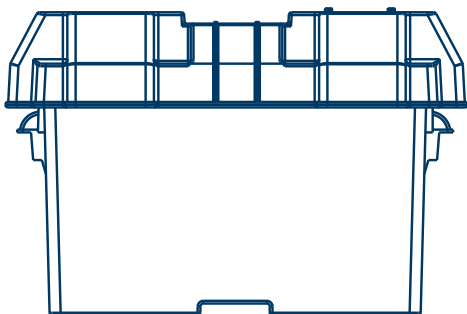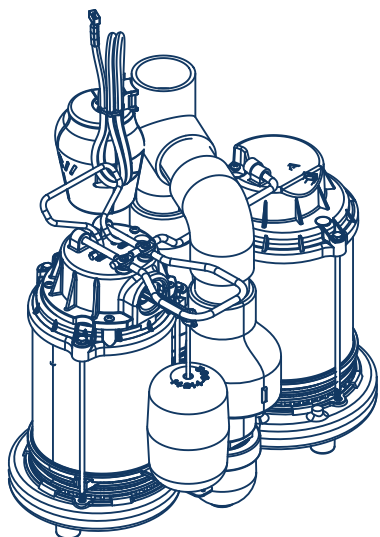

● Combined ● F100SSn ● BACK UP

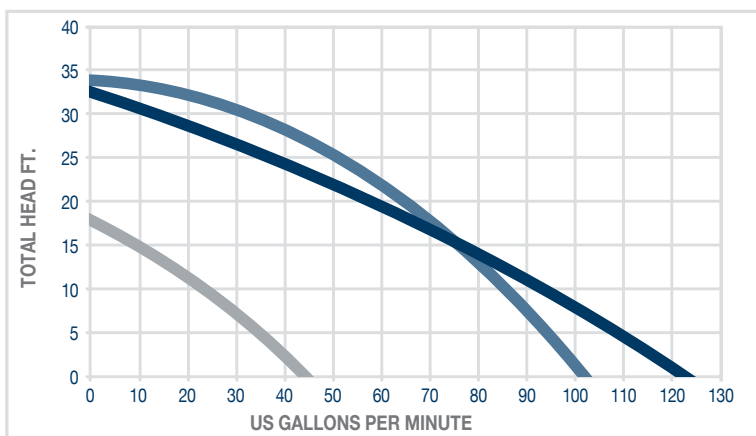

JOB-READY, PRE-ASSEMBLED BATTERY BACK UP AND PRIMARY SUMP PUMP SYSTEM

MODEL: F100SSn, 1 HP

PUMP SNAPSHOT

- ▶ **HP** - F100SSn 1 HP | 100 Watt
- ▶ **Construction** - Stainless Steel Housing/ Cast Iron Base
- ▶ **Switch Type** - Integrated Mechanical Float Switch
- ▶ **Motor** - 120 Volt, PSC Oil-Filled Motor
- ▶ **Motor** - 12 Volt DC Back Up Pump
- ▶ **Impellers** - Centrifugal
- ▶ **Intakes** - Top Suction
- ▶ **Discharge** - 1 1/2 In. NPT
- ▶ **Submersible** - Yes
- ▶ **F100SSn UPC** - 040066218971

SYSTEM SPECIFICATIONS

- ▶ **Length** - 15 1/2 In.
- ▶ **Width** - 9 In.
- ▶ **Height** - 15 1/2 In.
- ▶ **Weight** - 46 Lbs.
- ▶ **Power Cord** - 8 Ft.

FLOW RATES:

MODEL:F100SSn - 1 HP	GPM @ 5'	GPM @ 10'	GPM @ 15'	GPM @ 20'
Gal/Min @ 0 MAX Flow 102	94	85	76	64

DC BACK UP PUMP	GPM @ 5'	GPM @ 10'	GPM @ 15'	GPM @ 20'
Gal/Min @ 0 MAX Flow 45	35	25	11	-

COMBINED	GPM @ 5'	GPM @ 10'	GPM @ 15'	GPM @ 20'
Gal/Min @ 0 MAX Flow 124	110	92	76	58

5 YEAR LIMITED WARRANTY

- ▶ Assembled in USA with Foreign and Domestic Parts

